


Open Frame Series Compressors

Open Frame. Exceptional Quality.

Arctic Open Frame Compressors deliver up to 14 CFM at 6000 PSI. Just like with every other Arctic Compressor, they come standard with excellent durability, easy maintenance, and superior cooling.

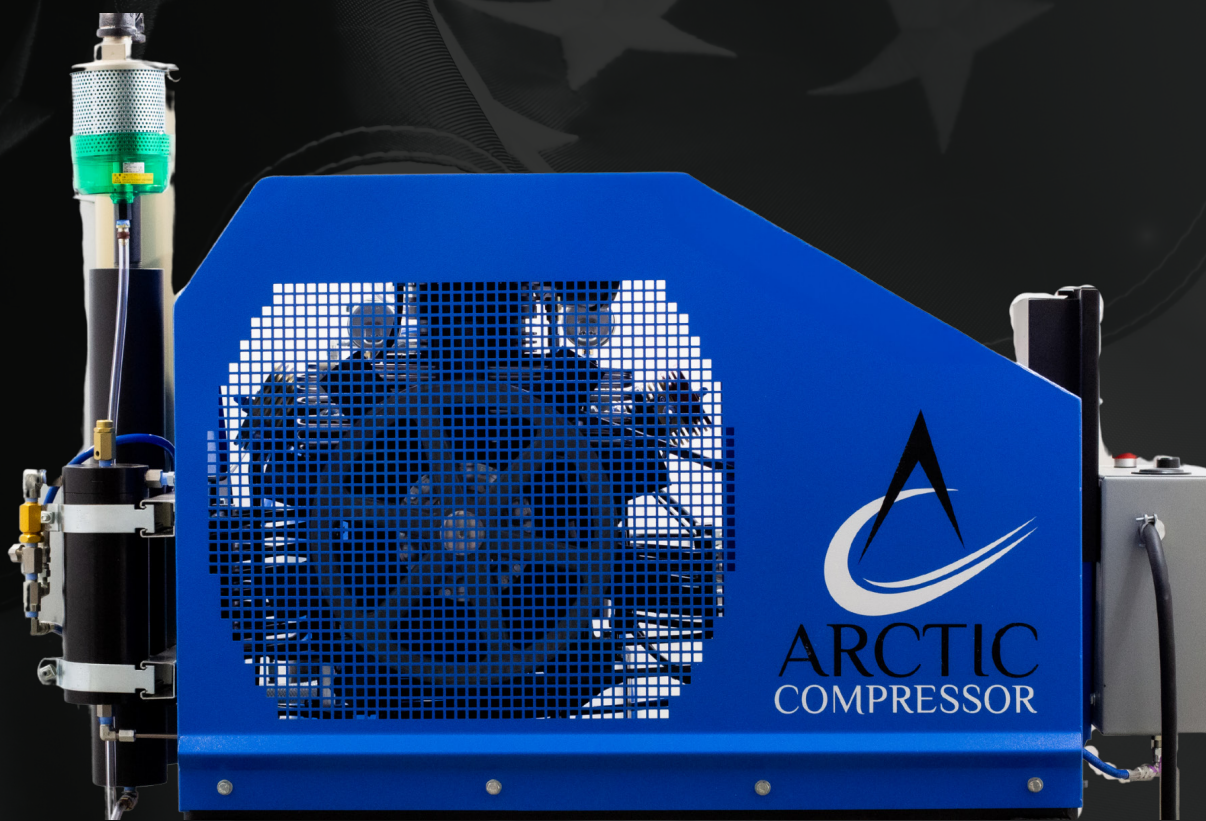

**Made in
the USA**

ARCTIC
COMPRESSOR

Product Comparison

Model	PSI	CFM	HP	Stages	Series
E4-20-A6	6000	24	20	4	2500 Series
E4-15-A6	6000	18	15	4	
E4-10-A6	6000	14	10	4	1500 Series
E4-7.5-A6	6000	9	7.5	4	
E3-7.5-A6	6000	8	7.5	3	1000 Series
E3-7.5-A	5000	9	7.5	3	
O4-10-A6	6000	9	10	4	
O3-7.5-A6	6000	8	7.5	3	
O3-7.5-A	5000	9	7.5	3	

Electrical Requirements

All Arctic Compressors include an 8ft electrical cord and plug. Our Open Frame Series Compressors requires the following:

208/240V Connection				480V Connection	
Phase	HP	Connector	Amperage	Connector	Amperage
3	7.5	NEMA L15-30	30 Amp	NEMA L16-20	20 Amp
3	10	NEMA L15-30	30 Amp	NEMA L16-20	20 Amp
1	7.5	NEMA 6-50	50 Amp		
1	10	NEMA 6-50	50 Amp		



Truly American-Made™

▶ Crafted in Superior, WI.



Grade E Breathing Air

Our compressors deliver CGA Grade E breathing air, the gold standard for respiratory safety. This premium air quality not only meets but **exceeds** the stringent requirements set by regulatory bodies.



Air Purification

Filtration Technology

- Activated charcoal removes harmful gases and odors
- Carbon monoxide catalyst converts CO to harmless CO₂
- Ensures highest level of air purity for safe breathing

Moisture Control

- Reliable dryer filter
- Maintains dew point at or below -65°F (NFPA 1500 compliant)
- Prevents condensation and corrosion

What's Included

Moderate Noise Operation

- 92 dB Sound Level at 1 Meter

Easy Maintenance

- Automatic Condensate Drain System
- Easy Oil Maintenance Accessibility

Powerful Motor

- High-Efficiency Single or Three-Phase Electric Motor

Simple Lubrication System

- Splash Lubrication Oil System
- 3 qt Oil Capacity

Real-Time Monitoring

- Interstage Pressure Gauges
- Hour Meter

Durable Compressor Block

Radial Arctic Compressor Block, equipped with

- 10-Bladed High Velocity Fan
- Relief Valve on All Stages
- Aluminum Intercoolers
- Stainless Steel Aftercoolers
- Forged Steel Crankshaft
- Cast Iron Cylinders


Optional Upgrades

- Arctic M4200 CO Monitor
- Low Oil Auto Shutdown
- High-Temp Auto Shutdown
- Remote Start
- Dual Pressure System
- Additional Filtration Capacity

Dimensions

Width

Height

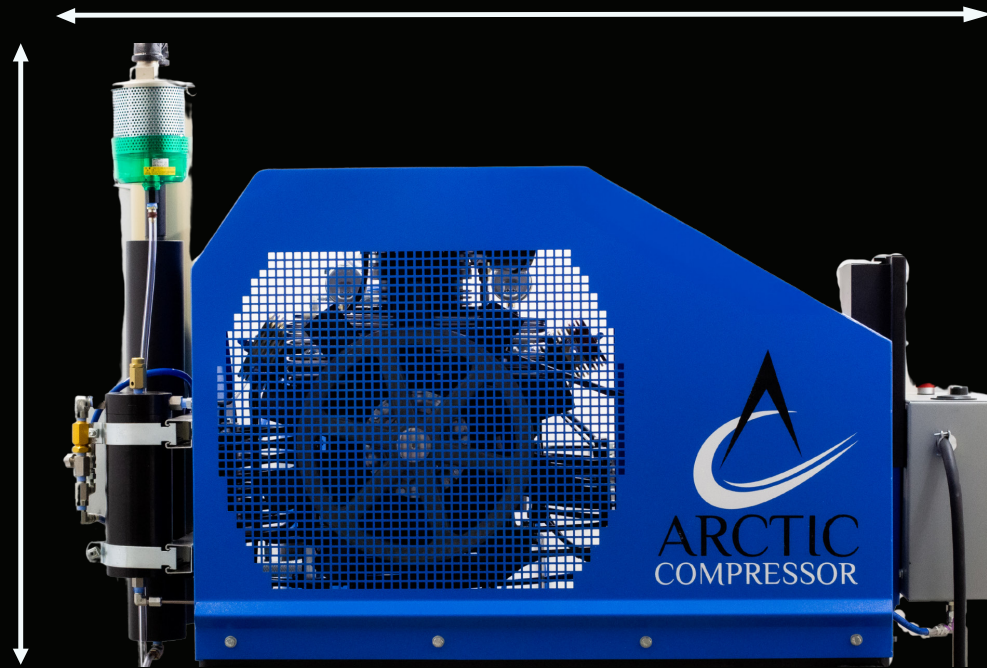

Stages	Width	Height	Depth	Weight
3	48"	36"	20"	320lbs
4	48"	36"	20"	410lbs



Warranty

All Arctic Compressors come with a standard 2-year warranty. Extend your coverage up to 5 years with our Silver or Gold Warranty options.



69 North 28th Street,
Suite #500
Superior, WI 54880

(715) 718 - 3065

ArcticCompressor.com